



## 2026+ Kia K4 Hatch/5DR Mud Flap Installation Instructions




**Manufacturer limited-warranty covers material defects on new & never installed parts. Customer is responsible for installation, usage, and replacement part costs.** Caution against blind spots during parking. Avoid curbs and compression to flaps. **Ensure sufficient exhaust, wheel, suspension clearances.**

**INSTALLATION QUESTION? FOR REPLACEMENT PART QUOTES, SUBMIT ORDER RECEIPT OR VEHICLE PHOTO to [rallyarmor.com/support](https://rallyarmor.com/support)**

**Recommended Tools** Low-profile offset, ratcheting, flat & Phillips screwdrivers, pick, isopropyl alcohol, razor.

**Install on even surface. Use hand tools, not powered. AVOID OVERTIGHTENING HARDWARE.**

**ABOUT OUR STANDARD IN MUD FLAPS** Polyurethane is a high grade plastic that may have superficial surface marks that blend into the material over time. These **visual variations** do not affect construction or performance.

| MUD FLAP KIT PN MF161     | MPC PN GGH46AP100                                                                   | PART DESCRIPTION    | QUANTITY |
|---------------------------|-------------------------------------------------------------------------------------|---------------------|----------|
| MF161-LF                  |                                                                                     | LEFT FRONT          | 1        |
| MF161-RF                  |                                                                                     | RIGHT FRONT         | 1        |
| MF161-LR                  |                                                                                     | LEFT REAR           | 1        |
| MF161-RR                  |                                                                                     | RIGHT REAR          | 1        |
| <b>BRACKET PN BMF161</b>  | <b>IMAGES</b>                                                                       |                     |          |
| BMF92-1                   |    | BRACKET RIGHT REAR  | 1        |
| BMF92-2                   |    | BRACKET LEFT REAR   | 1        |
| BMF111-1                  |   | BRACKET FRONT       | 2        |
| BMF111-2                  |  | BRACKET LEFT FRONT  | 1        |
| BMF111-3                  |  | BRACKET RIGHT FRONT | 1        |
| BMF161-1                  |  | BRACKET REAR        | 2        |
| <b>HARDWARE PN HMF161</b> | <b>IMAGES</b>                                                                       |                     |          |
| .25SP                     |  | SPACER              | 2        |
| 1SS                       |  | SCREW               | 4        |
| 1SS#8                     |  | THIN SCREW          | 2        |
| BLKNUT                    |  | NUT                 | 4        |
| EXPANCH                   |  | ANCHOR              | 2        |
| HXBLT                     |  | BOLT                | 4        |
| INS5                      |  | INSERT              | 2        |
| SMF29-1                   |  | FOAM SPACER         | 4        |
| SMF161-1                  |  | SPACER RIGHT REAR   | 1        |
| SMF161-2                  |  | SPACER LEFT REAR    | 1        |
| SMWASH                    |  | WASHER              | 22       |
| SSLNUT                    |  | LOCK NUT            | 4        |



## 2026+ Kia K4 Hatch/5DR Mud Flap Installation Instructions

**Do not fully tighten fasteners until mud flaps are completely aligned to vehicle.**

**FRONT FLAP** To access interior wheel well, turn steering wheel towards installation side.


**Mount printed logo side of flap facing rear bumper.**

Parts x 1 Flap → 1 x BMF111-1; 1 x BMF111-2/3; 1 x .25SP; 2 x 1SS; 1 x 1SS#8; 2 x BLKNUT; 1 x EXPANCH; 2 x HXBLT; 7 x SMWASH

**IMAGE A** Remove fasteners 1 & 2.

**IMAGE B** Fold EXPANCH. Install into under-vehicle mount 3. Insert pick into hole of EXPANCH to expand stems. Place .25SP, then BMF111-2(3) over EXPANCH. Install SMWASH & 1SS#8 into EXPANCH.

**IMAGE C** Place BMF111-1 over flap side facing tire. Install SMWASH & 1SS into mounts 1 & 2 and SMWASH & HXBLT into mounts 4 & 5. Mount SMWASH & BLKNUT onto opposite side of HXBLT. Align flap to vehicle. Tighten fasteners just until seated to flap.

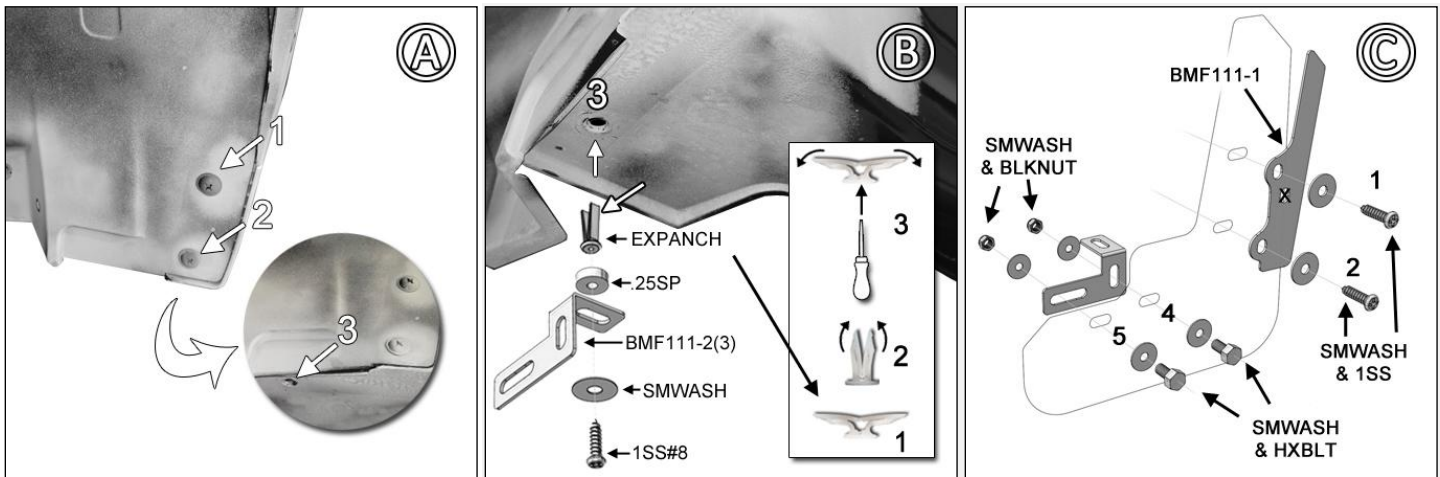


**REAR FLAP** Parts x 1 Flap → 1 x BMF92-1/2; 1 x BMF161-1; 1 x INS5; 2 x SMF29-1; SMF161-1/2; 4 x SMWASH; 2 x SSLNUT

**Mount printed logo side of flap facing rear bumper.**

**IMAGE D** Temporarily remove fasteners 1 & 2. Remove under-vehicle fastener 3.

**IMAGE E** Place stud-side of BMF92-1/2 facing front of vehicle & over liner. Install INS5 into mount 3.

**IMAGE F** To remove film, dab isopropyl alcohol over SMF29-1 & SMF161-1 backing. Lift away with razor.

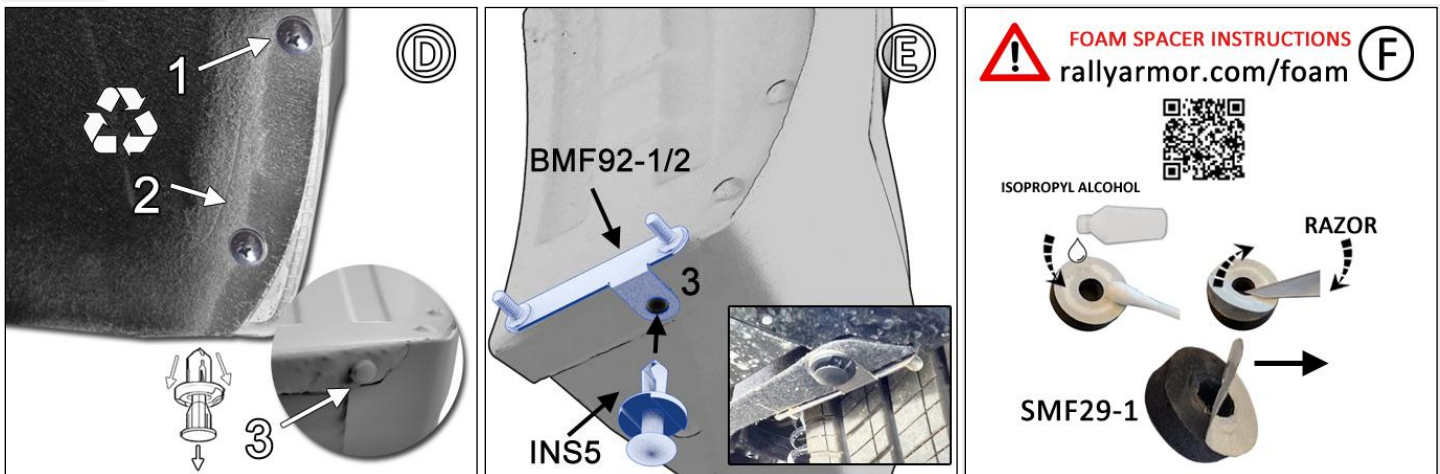




## 2026+ Kia K4 Hatch/5DR Mud Flap Installation Instructions

**IMAGE G** Wipe area clean. Adhere SMF29-1 over mounts 1 & 2 and SMF161-1/2 along edge of bumper, above mount 1.

**IMAGE H** Place BMF161-1 over flap side facing tire. Install SMWASH & factory fastener into mounts 1 & 2 and SMWASH & SSLNUT through mounts 4 & 5.

**IMAGE I** Align flap to vehicle. Tighten fasteners just until seated to flap.

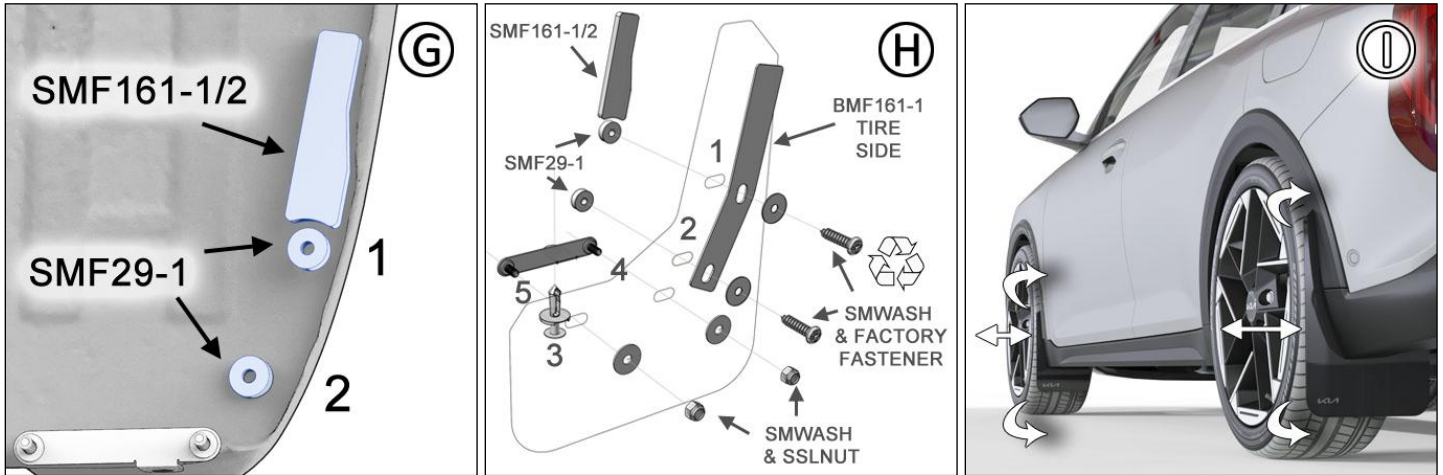

FRONT

REAR

