



## 2020+ TOYOTA GR YARIS MUD FLAP INSTALLATION INSTRUCTIONS












Manufacturer warranty covers material defects on new, never installed parts. Once installed, all replacement part costs are the responsibility of the vehicle owner. Caution against blind spots during parking. Avoid curbs and excessive compression to flaps. Check for sufficient exhaust, wheel, suspension clearances.

**INSTALLATION QUESTION? FOR REPLACEMENT PART QUOTES, SEND FLAP RECEIPT OR PHOTO → [www.rallyarmor.com/support](http://www.rallyarmor.com/support)**

**Recommended Tools** 10mm/11mm wrench, Phillips screwdriver, Pick.

**Install on even surface using hand tools, not powered tools. AVOID OVERTIGHTENING HARDWARE.**

**ABOUT OUR STANDARD IN MUD FLAPS** Polyurethane is a high grade plastic that may feature minor surface layer marks. These are visual variations that don't affect flap construction or performance. Most matte away as the material ages.

CONFIRM ALL PARTS AND QUANTITIES BEFORE INSTALLATION		
MUD FLAP PN MF74 SEE PAGE 4	PART DESCRIPTION	QUANTITY
MF74-LF	LEFT FRONT	1
MF74-RF	RIGHT FRONT	1
MF74-LR	LEFT REAR	1
MF74-RR	RIGHT REAR	1
BRACKET PN BMF74		
BMF74-FRT	 BRACKET FRONT	2
BMF74-LR	 BRACKET LEFT REAR	1
BMF74-RR	 BRACKET RIGHT REAR	1
HARDWARE PN HMF74		
1SS	 SCREW	10
BLKNUT	 BLACK NUT	2
HXBLT	 BOLT	2
INS7	 INSERT	4
POLCLP	 CLIP	4
SMWASH	 WASHER	22



**2020+ TOYOTA GR YARIS MUD FLAP INSTALLATION INSTRUCTIONS**

SSLNUT		LOCK NUT	6
UNUT		CLIP 2	6

**Do not fully tighten fasteners until flap is completely aligned to vehicle.**

**FRONT FLAP** To access inner wheel well area, turn steering wheel towards installation side.

Parts 1 Flap → 1 x BMF74-FRT; 3 x 1SS; 1 x BLKNUT; 1 x HXBLT; 2 x POLCLP; 6 x SMWASH

**FIGURE A** Remove factory fasteners 2 - 4. Temporarily remove fastener 1 & two underbody fasteners. Move liner away.

**FIGURE B** Install POLCLP over mounts 3 & 4.


**FIGURE C** Replace liner. Reinstall lower factory fastener.



**FIGURE D** Place BMF74-FRT over liner mounts 3 & 4. Place logo-side of flap facing rear bumper, over mounts 3 & 4.

**FIGURE E** Install SMWASH & factory fastener 1 into mount 1 and SMWASH & 1SS into mounts 2 - 4. Install SMWASH & HXBLT into mount 5 and SMWASH & BLKNUT onto reverse side.

**FIGURE F** Ensure flap is parallel to even ground before tightening fasteners until just seated against flap.

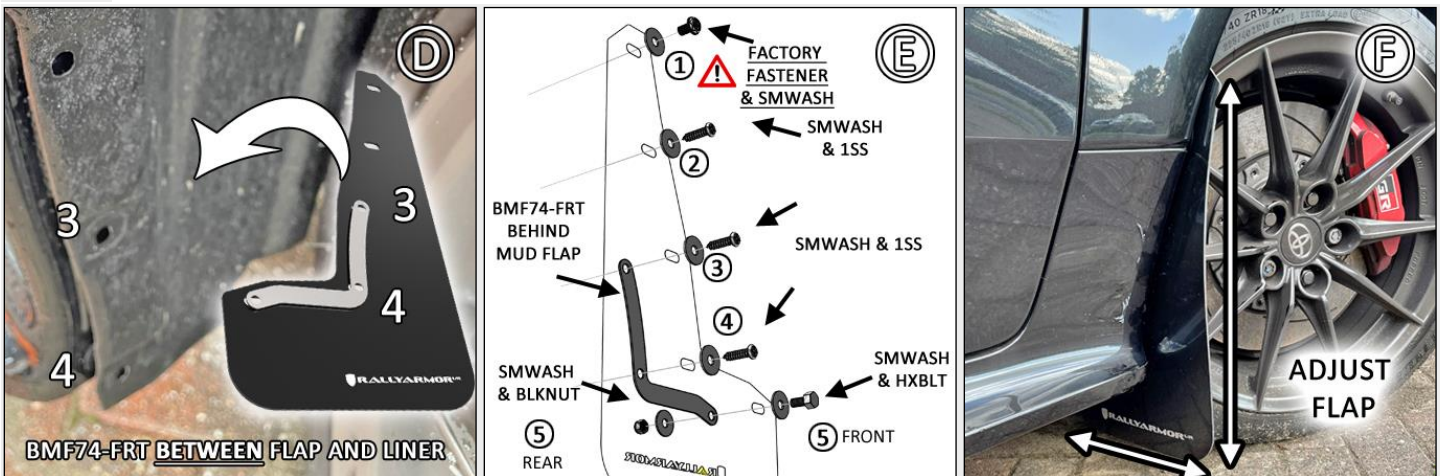



**2020+ TOYOTA GR YARIS MUD FLAP INSTALLATION INSTRUCTIONS**


**REAR FLAP** Parts 1 Flap → 1 x BMF74-LR/RR; 2 x 1SS; 2 x INS7; 5 x SMWASH; 3 x SSLNUT; 3 x UNUT

Though not required, tire removal eases installation. Option 2, jack rear of vehicle to gain better access to wheel well.

**FIGURE G** Remove liner fasteners. Pull liner away.

**FIGURE H** Install INS7 into BMF74-LR/RR square mounts. Slightly curve 1 - 2mm, so it nests against liner.


**FIGURE I** Place bottom of BMF74-LR/RR over liner mount and top tab against liner.

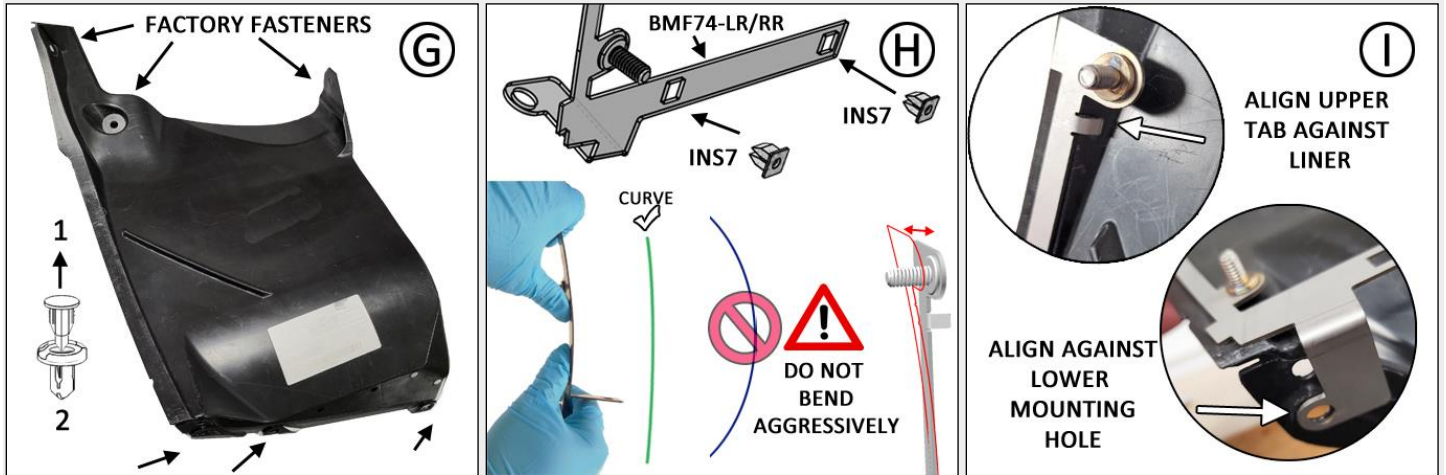

**FIGURE J** Flat side of UNUT mounts behind liner. Fasten angled side of UNUT over 3 tabs on BMF74-LR/RR & liner. For 2025+ GR Yaris, see M for offset clip position.

**FIGURE K** Reinstall liner. Place BMF74-LR/RR bottom between bumper skin & liner. Do not mount outside bumper skin. Reinstall factory fastener. Place flap over BMF74-LR/RR mounts 1 – 3. Fasten SMWASH & SSLNUT. Install SMWASH & 1SS into mounts 4 & 5.

**FIGURE L** Ensure flap is parallel to even ground before tightening fasteners until just seated against flap.

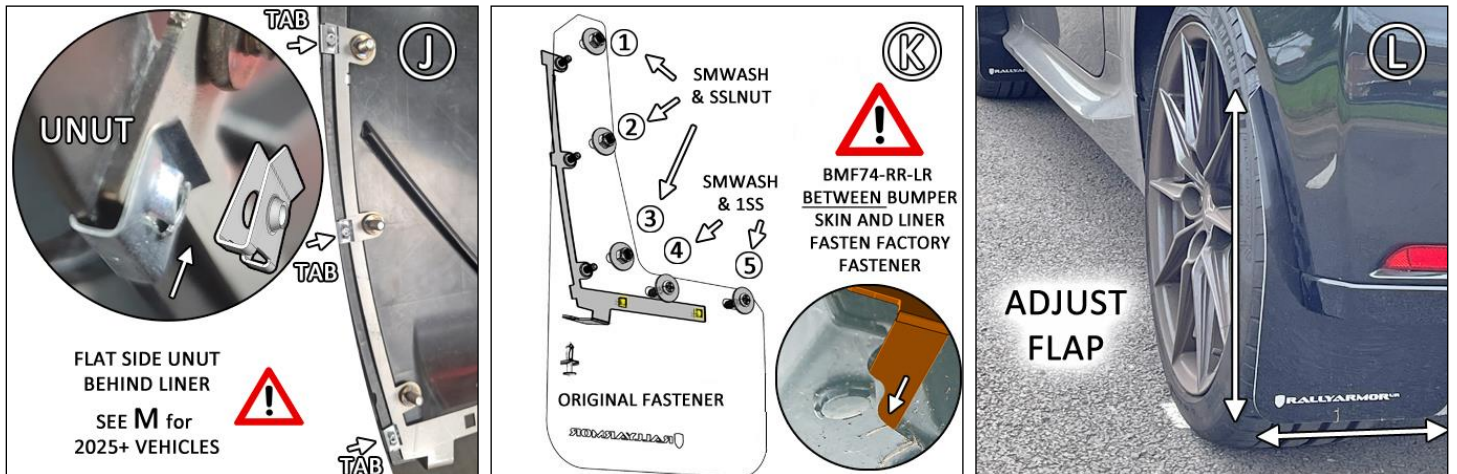



**2020+ TOYOTA GR YARIS MUD FLAP INSTALLATION INSTRUCTIONS**



FRONT

MF74 MOUNTING DIAGRAM

REAR

